SLIDE-LERS™

ASGCO®
Complete Conveyor Solutions

Slide-Lers™ have the ability to change rolls under the loading skirt area without having to remove adjacent idlers. This allows the Slide-Lers™ to fit into tight or confined spaces ensuring proper rolling support and the changing an idler roll just got easier.

Change Rolls Without Removing Adjacent Idlers.

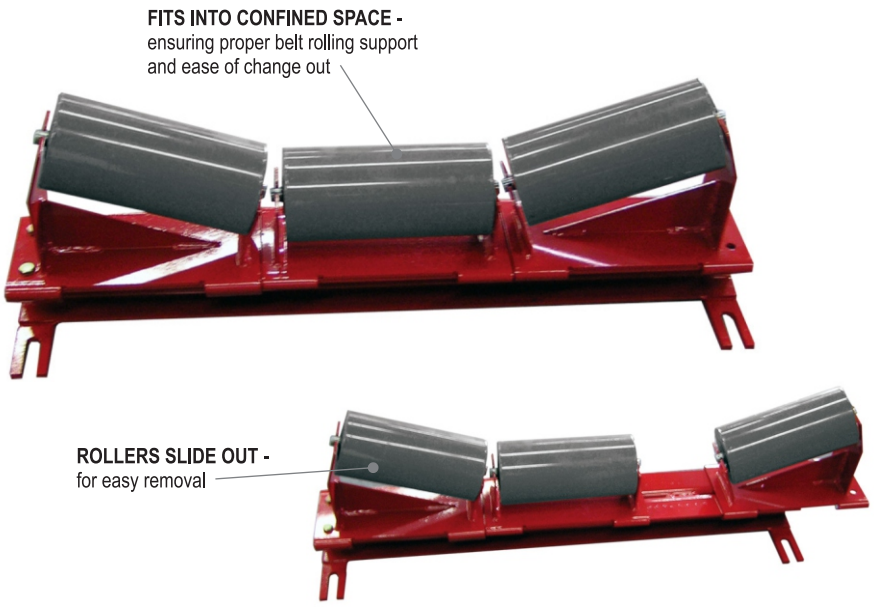

- **Perfect for Confined Spaces** – due to the frames only take-up 8" (200mm) of width when using 6" (150mm) rollers.
- **Improves Safety** – by allowing maintenance to easily remove the rollers without having to remove any of the belt idler frames.
- **Meets all CEMA Standards** – and available in any belt width, troughing angle or idler.
- **One-sided Slide-Ler**™ - Also available.

SLIDE-LERS™

ASGCO® **Slide-Lers**™ give you the ability to change rolls under the conveyor loading skirt area without having to remove adjacent belt idlers. This allows the Slide-Ler™ to fit into tight or confined spaces, ensuring proper belt rolling support and ease of change out.

Diagram Components

1. Center Slide
2. Roller Retainer
3. Frame
4. Wing
5. Steel Roll

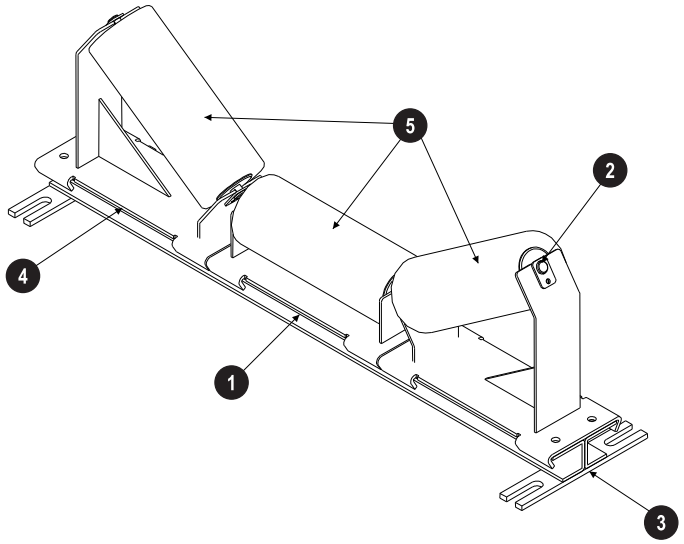

Slide-Ler™ Modular Idler Frame		
Part Number	Belt Width	
	in	mm
M-ASG-SLIDELER-18-(XX)	18	450
M-ASG-SLIDELER-24-(XX)	24	600
M-ASG-SLIDELER-30-(XX)	30	750
M-ASG-SLIDELER-36-(XX)	36	900
M-ASG-SLIDELER-42-(XX)	42	1050
M-ASG-SLIDELER-48-(XX)	48	1200
M-ASG-SLIDELER-54-(XX)	54	1350
M-ASG-SLIDELER-60-(XX)	60	1500
M-ASG-SLIDELER-72-(XX)	72	1800
M-ASG-SLIDELER-84-(XX)	84	2100
M-ASG-SLIDELER-96-(XX)	96	2400

Troughing Idlers available in 20°,35° or 45°.
***XX** =Degree of Trough
* **Note**: Idler rolls can be supplied by customer

© 6/2015 ASGCO® "Complete Conveyor Solutions"