

# VIBRATING DRIBBLE CHUTE

## Conveyor Accessories



The ASGCO® **Vibrating Dribble Chute** combines a vibrator with a unique isolation mount and a low-friction UHMW chute liner to prevent buildup in dribble chutes.

**"ISOLATION" BRACKET -**  
rubber lined to protect the  
chute and cut build-up




**RUGGED VIBRATOR -**  
provides precise performance




- **Vibrating Liner Keeps Material Moving** - Keep material accumulations from clogging chute and burying cleaners.
- **Liner Cuts Buildup** - Low-friction UHMW lining promotes material flow without accumulation. Each liner is 1/2" thick by belt width and 36" in length. Custom size liners can be made at customers' request.
- **"Isolation" Bracket Protects Chute** - Rubber-lined bracket transfers vibration to liner without metal fatigue.
- **Rugged Vibrator Provides Precise Performance** - 115 Volt 60HZ Single Phase (with switch-box) Electric Vibrator provides 480 lbs of Force with durable performance. Other vibrators are dependent upon chute size and are available by customers' request.

# VIBRATING DRIBBLE CHUTE

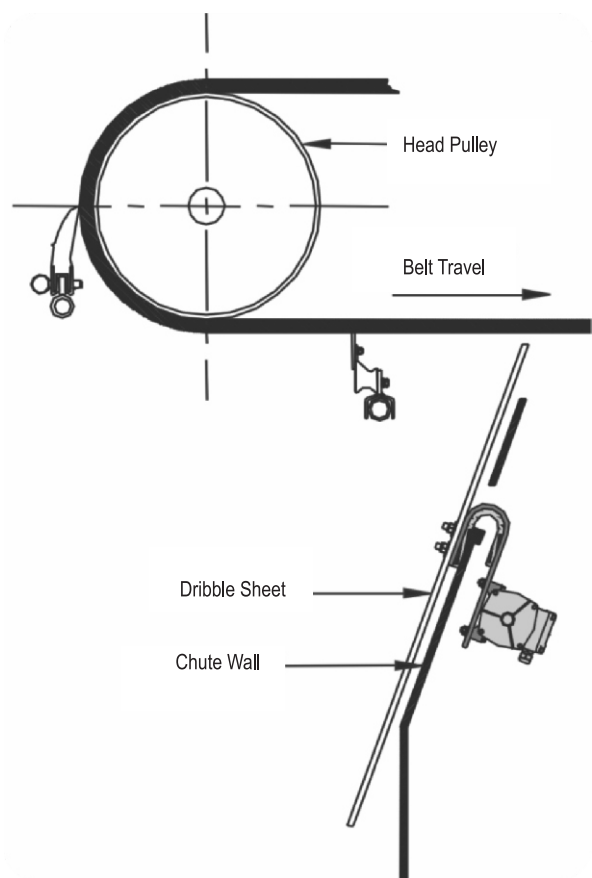

Vibrating Dribble Chute		
Part Number	Belt Width	
	in	mm
M-ASG-DCV-18	18	450
M-ASG-DCV-24	24	600
M-ASG-DCV-30	30	750
M-ASG-DCV-36	36	900
M-ASG-DCV-42	42	1050
M-ASG-DCV-48	48	1200
M-ASG-DCV-54	54	1350
M-ASG-DCV-60	60	1500
M-ASG-DCV-72	72	1800
M-ASG-DCV-84	84	2100

Replacement UHMW Liner (1/2" Thick Belt Width 36" x 36" Length)		
Part Number	Belt Width	
	in	mm
ASG-DCV-UHMW-18	18	450
ASG-DCV-UHMW-24	24	600
ASG-DCV-UHMW-30	30	750
ASG-DCV-UHMW-36	36	900
ASG-DCV-UHMW-42	42	1050
ASG-DCV-UHMW-48	48	1200
ASG-DCV-UHMW-54	54	1350
ASG-DCV-UHMW-60	60	1500
ASG-DCV-UHMW-72	72	1800
ASG-DCV-UHMW-84	84	2100

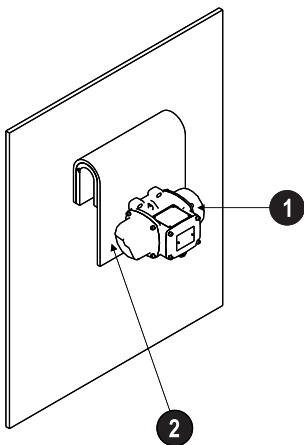

Replacement Vibrator and Bracket	
Part Number	Description
ASG-EV480	Vibrator
ASG-DCV-MB	Mounting Bracket