



# DURA-SEAL™ (B&R)

## Conveyor Skirtboard Sealing System


ASGCO® Dura-Seal™ (B&R) is for optimum sealing and minimum wear on the conveyor belt, engineered for harsh environments.

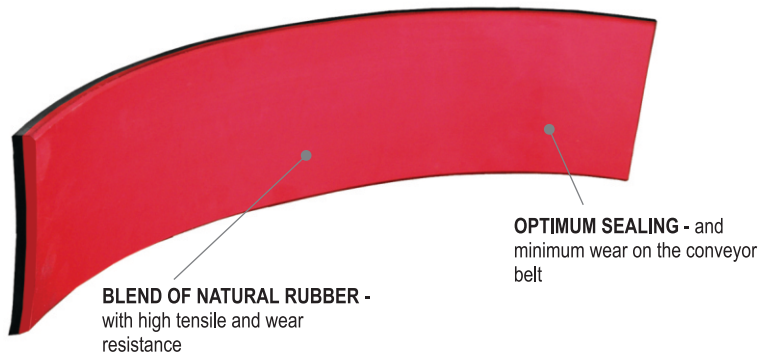

- **A blend of natural rubber** – with high tensile and tear resistance. The lower half is the same compound as used with Dura-Seal™ (ORG)(45) for its excellent sealing ability, and the upper half is the same as used with Dura-Seal (60) for its cut and abrasion resistance.
- **Dura-Seal (ORG 45)** – compound for optimum sealing and minimum wear on the conveyor belt. Engineered to meet harsh conveyor environments.
- **Dura-Seal (60)** – compound for best wear and impact resistance in the load zone.
- **Exceptional Sealing** – in abrasive and impact area conditions where cut and gauge is a problem, as seen in hard rock mining.

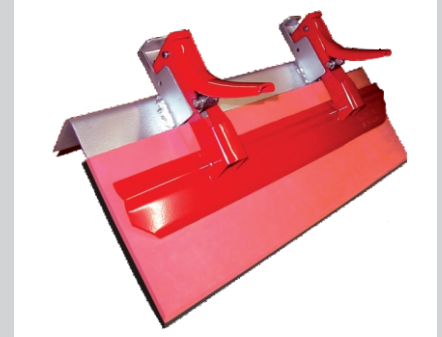

Dura-Seal™ (B&R) Conveyor Skirtboard Sealing System				
Part Number	Skirting Type Sealing Compound	Duro-meter	Thickness in	Width in
ADS-B&R-2544-B	Dura-Seal™ B&R Compound	45	1	4
ADS-B&R-2545-B	Dura-Seal™ B&R Compound	45	1	5
ADS-B&R-2546-B	Dura-Seal™ B&R Compound	45	1	6
ADS-B&R-2548-B	Dura-Seal™ B&R Compound	45	1	8
ADS-F&O-2544-B	Dura-Seal™ Flame & Oil Resistant	45	1	4
ADS-F&O-2545-B	Dura-Seal™ Flame & Oil Resistant	45	1	5
ADS-F&O-2546-B	Dura-Seal™ Flame & Oil Resistant	45	1	6
ADS-F&O-2548-B	Dura-Seal™ Flame & Oil Resistant	45	1	8
ADS-F&O-1904-B	Dura-Seal™ Flame & Oil Resistant	45	3/4	4
ADS-F&O-1905-B	Dura-Seal™ Flame & Oil Resistant	45	3/4	5
ADS-F&O-1906-B	Dura-Seal™ Flame & Oil Resistant	45	3/4	6
ADS-F&O-1908-B	Dura-Seal™ Flame & Oil Resistant	45	3/4	8

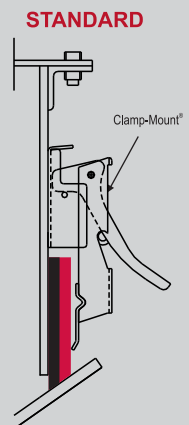

**Need Solutions....to improve efficiency, safety and productivity? ask... ASGCO®**

www.asgco.com | 800.344.4000

© 6/2015 ASGCO® "Complete Conveyor Solutions"

