

SAFE-GUARD® INSPECTION DOORS

Access Door For Belt Cleaner Inspections & Blade Change Outs

Safe-Guard® Chute Inspection and Access Doors are a necessary part of any material handling system. Add an inspection door to your existing head chute for access to cleaners, for chute clean-out, and blade change-outs.





SCREEN GUARD - provides a safe manner to visibly inspect the chute

ADD TO YOUR EXISTING HEAD CHUTE - for safe access to cleaners and chute clean-out.

Features and Benefits:

- **Low Profile Steel Construction** - available in powder coated or zinc plated.
- **Safety Inspection Screen Guard:** Standard on every door for the ability to safely inspect equipment while it is running.
- **Inspection Screen:** Complies with ANSI B.20.1 1984 and ISO 1819-02.1.11.
- **Designed 45° Flange Frame** - to prevent fines from accumulating on the interior of the door.
- **EPDM Dust Seal:** can withstand temperatures from -40 degrees F to 200 degrees F.
- **Options to Fit Conditions:** Materials to match conditions, including food-grade applications.
- **Available in 3 Standard sizes:** 12" x 12", 12" x 18" and 18" x 24".
- **Available in Heavy Duty sizes:** 12" x 18", 18" x 24", 24" x 24" and 24 x 36".
- **Custom Sizes Available**

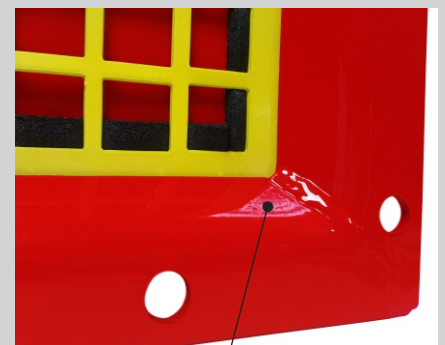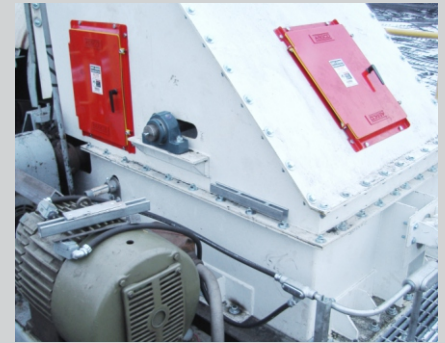

45° degree flange on interior of door prevents fines from accumulating.

SAFE-GAURD® INSPECTION DOORS

SAFE-GUARD® STANDARD CONVEYOR INSPECTION DOOR





Safe-Guard® Standard Inspection Door		
Part Number	Size (inches)	Wt. Lbs.
M-ASG-SID-12x12	12"x12"	10
M-ASG-SID-12x18	12"x18"	14
M-ASG-SID-12x24	18"x24"	20

Standard Conveyor Chute Inspection Door

- 12 Gauge .1046


SAFE-GUARD® HEAVY DUTY CONVEYOR INSPECTION DOOR

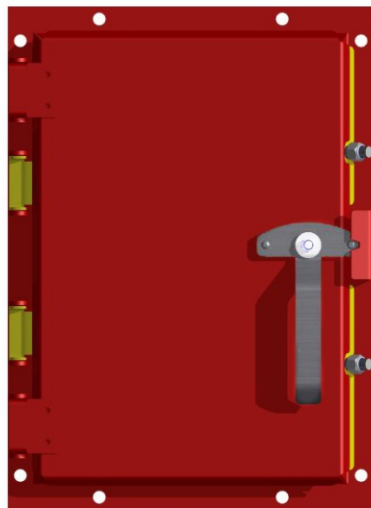

Safe-Guard® Heavy Duty Inspection Door		
Part Number	Size (inches)	Wt. Lbs.
M-ASG-SIDHD-12x18	12"x18"	25
M-ASG-SIDHD-18x24	18"x24"	40
M-ASG-SIDHD-24x24	24"x24"	50
M-ASG-SIDHD-24x36	24"x36"	68

Heavy Duty Conveyor Chute Inspection Door

- 11 Gauge .1196

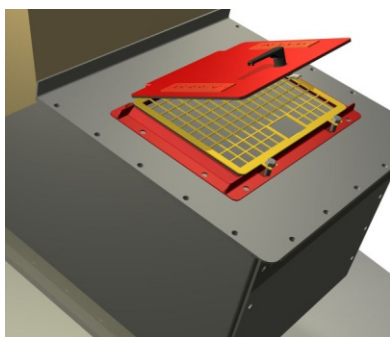

REGULATIONS

To be in compliance with OSHA and MSHA, the installation of safety-oriented products can help create a safer plant that is easier to service and maintain.

See OSHA and MSHA guidelines for safety compliance.



SCREEN GUARDS

- Standard on every door for safe equipment inspection
- Provides a safe manner to visibly inspect chute
- Prohibit extremities to break the plane of the chute area
- Requires the use of tools to safely open the screen which complies with most safety regulations

Need Solutions....to improve efficiency, safety and productivity? ask... ASGCO®

www.asgco.com | 800.344.4000