

VUL-CON®

EZ SERIES VULCANIZING PRESS

ASGCO®
Complete Conveyor Solutions

ASGCO® **VUL-CON® EZ Series Frame Press** is a solid aluminum frame style vulcanizing press that allows for quick and easy operation. With end handles and positioning rings, the Vul-Con™ EZ Series Vulcanizing Press is easy to maneuver into the desired splice position.



FEATURES AND BENEFITS

- Aramid Reinforced Pressure Bag – uniform pressure system across splice surface
- Custom “Extruded Plank” cooling system within platens
- Innovative “Silicone Element” fast heating system
- Two piece welded aluminum frame construction
- Platens built to order in rhombic design
- Quick assembly and disassembly for short vulcanizing cycles
- Rapid heat up and cool down time
- Multiple units can be used side by side for longer splice lengths
- Platen maximum temperature 338°F (170°C)
- 480 Voltage / 3 Phase
- 1 Year Guarantee
- Max operating pressure 100 psi (7kg/cm²)
- Integrated air control box

EMBEDED CONTROL BOX FEATURE

- Exact temperature reading in each heating plate via thermo-sensor PT 100
- Quick and simple programming of the electronic temperature control
- Differential monitoring of the individual heating circuits
- Vulcanizing max temperature 338°F (170°C)

Need Solutions...to improve efficiency, safety and productivity? ask... ASGCO®

www.asgco.com | 800.344.4000


@2024 ASGCO® “Complete Conveyor Solutions”

ASGCO®
Complete Conveyor Solutions

EZ SERIES FRAME PRESS | SPECIFICATIONS

MODEL - EZ 100 | Maximum operating pressure 100 psi (7kg/cm²)
Maximum temperature 338°F (170°C)

PART NUMBER	BW (B)		ANGLE / BIAS (E)	HEATED LENGHT (C)		HEATED WIDTH (D)		HEATED WD (F) BIAS		HEIGHT TOP		HEIGHT BOTTOM		POWER	WEIGHT TOP		WEIGHT BOTTOM	
	IN	MM		IN	MM	IN	MM	IN	MM	IN	MM	IN	MM		LBS	KG	LBS	KG
ASG-EZ100-21X32	26	650	22°	21 1/4"	540	29 1/2"	750	32"	810	7"	177	8"	202	480v - 3 PH	139	63	176	80
ASG-EZ100-21X38	32	800	22°	21 1/4"	540	35 1/2"	900	38"	970	7"	177	8"	202	480v - 3 PH	156	71	194	88
ASG-EZ100-21X42	36	900	22°	21 1/4"	540	39"	1000	42"	1078	7"	177	8"	202	480v - 3 PH	167	76	205	93
ASG-EZ100-21X49	42	1050	22°	21 1/4"	540	45"	1150	49"	1240	7 1/2"	194	8 1/2"	219	480v - 3 PH	207	94	246	112
ASG-EZ100-21X55	48	1200	22°	21 1/4"	540	51"	1300	55"	1400	7 1/2"	194	8 1/2"	219	480v - 3 PH	238	108	277	126
ASG-EZ100-21X63	55	1400	22°	21 1/4"	540	59"	1500	63"	1618	9"	224	10"	249	480v - 3 PH	286	130	326	148
ASG-EZ100-21X72	63	1600	22°	21 1/4"	540	67"	1700	72"	1830	10"	254	11"	279	480v - 3 PH	341	155	374	170

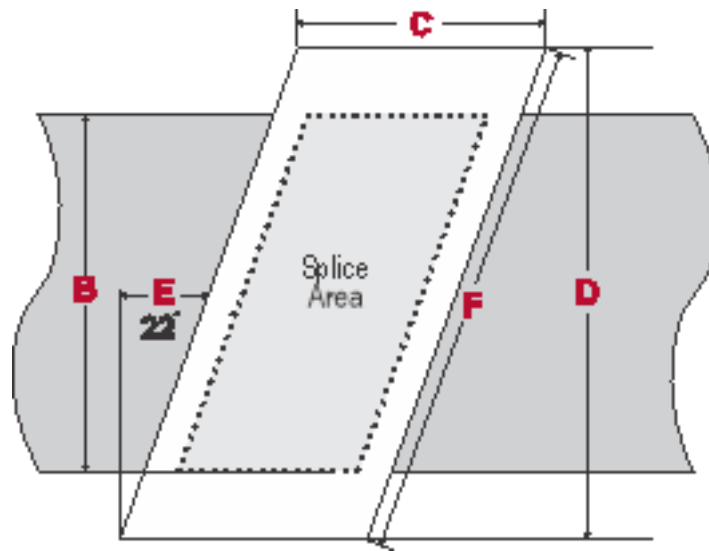

Need Solutions... to improve efficiency, safety and productivity? **ask... ASGCO®**

www.asgco.com | 800.344.4000

@2024 ASGCO® "Complete Conveyor Solutions"

