

VUL-CON®

FABRIC CONVEYOR BELT COVER STOCK




FABRIC BELT COVER STOCK FOR VULCANIZED BELT SPLICING

VUL-CON® Fabric Belt Cover Stock is a specially formulated uncured rubber used in vulcanized conveyor belt step and finger splicing. It is engineered for use as a cover rubber replacement material when splicing fabric conveyor belts. Our abrasion resistant compound chemically bonds to cured standard RMA Grade 1 and RMA Grade 2 cover rubber for conveyor belts.

PROPERTIES:

- Base Polymer: SBR Rubber
- Rubber Color: Black
- Poly Liner Color: Clear (Double-Sided) - Colored ends of rolls that determines thickness
- Specific Gravity: 1.18 – 1.24 (g/cm³)
- Hardness: 60 – 70 Shore A
- Rubber Tensile: 2000 min PSI
- Rubber Elongation: 450% min (at break)
- Shelf Life: 6 Months at 70 °F (21 °C) or 12 Months at 50 °F (10 °C).

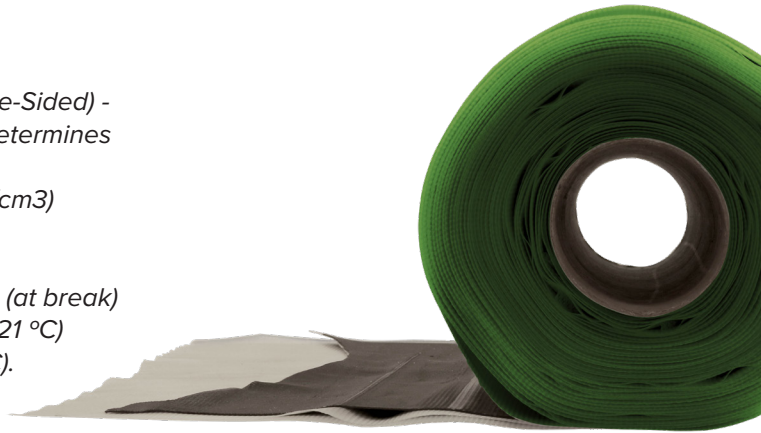


FEATURES AND BENEFITS

- Extends the durability of vulcanized splices
- Increases resistance to wear and tear on conveyor belt splices
- Removes surface contamination in standard applications with double-sided poly
- Utilizes a poly color-coding system to identify the compound
- Compatible with belt splices made of Natural Rubber (NR), Polyisoprene (IR), Styrene-Butadiene (SBR), Polybutadiene (BR), and Polychloroprene (Neoprene, CR)

Part Number	Thickness	Dimensions	Weight		Unit	End of Roll Color
			kg	lb		
ASG-VC-CS-0.188	0.188"	20" x 15.5'	15.4	34.00	Roll	Green
ASG-VC-CS-0.125	0.125"	20" x 25'	16.9	37.20	Roll	Yellow
ASG-VC-CS-0.063	0.063"	20" x 47'	15.4	34.00	Roll	Red

COLORED ENDS OF ROLLS THAT DETERMINES THICKNESS

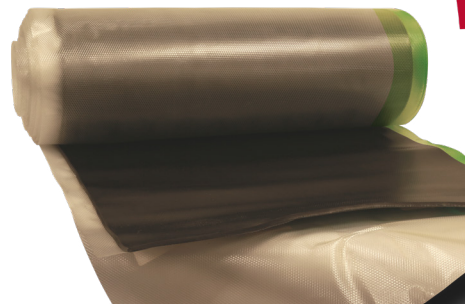

LEARN MORE!



Need Solutions... to improve efficiency, safety and productivity? **ask... ASGCO®**

www.asgco.com | 800.344.4000

@2024 ASGCO® "Complete Conveyor Solutions"

