


RAZOR-BACK® CSB RETRACTABLE BELT CLEANER

Retract. Replace. Resume. — Cleaner Belts, Zero Downtime

The **Razor-Back® CSB Retractable Secondary Conveyor Belt Cleaner** delivers maximum cleaning efficiency in a compact, maintenance-friendly package. Its innovative retractable design allows you to remove and replace the one-piece blade cartridge from outside the chute without breaking the plane of the conveyor or removing brackets reducing downtime and eliminating the need for confined-space permits.

SHOWN WITH
LOW-PROFILE SPRING-SHOC™ TENSIONER

LOW-PROFILE
SPRING-SHOC™ TENSIONER
Fits in low cleaning areas

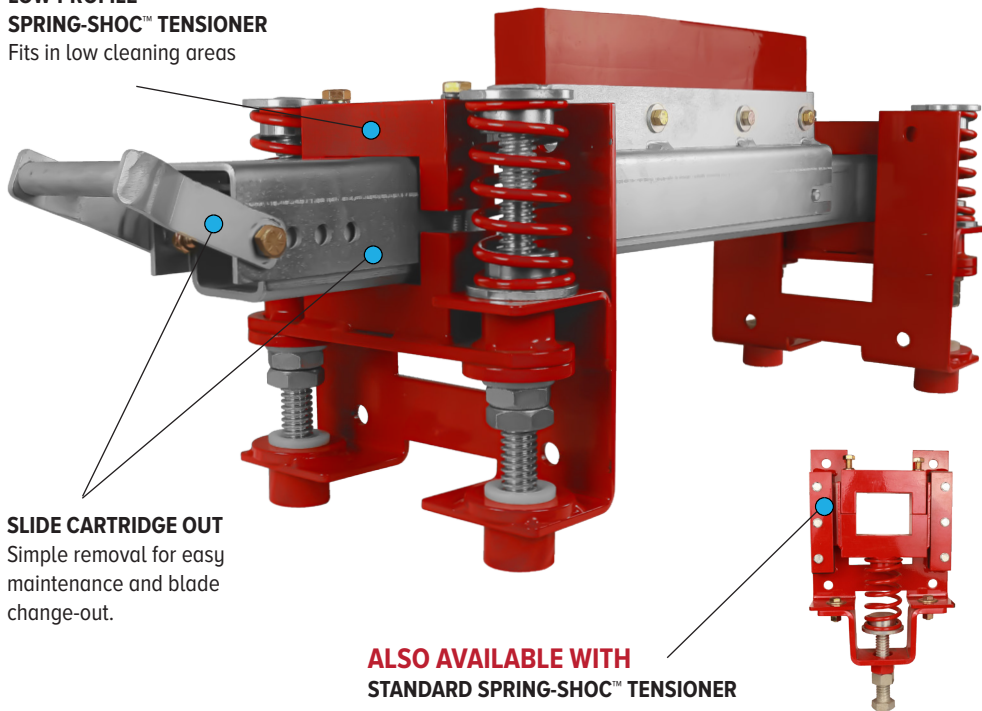

SLIDE CARTRIDGE OUT
Simple removal for easy
maintenance and blade
change-out.

ALSO AVAILABLE WITH
STANDARD SPRING-SHOC™ TENSIONER

FEATURES & BENEFITS

- **Compact, Retractable Design:** Quick-change cartridge accessible from outside the chute
- **One-Piece Urethane Blade:** 2" thick, wear-resistant (optional carbide tips) for maximum cleaning efficiency
- **Heavy-Duty Encapsulated Mount:** Secure blade retention in harsh environments
- **Versatile Compatibility:** Works with all ASGCO® Razor-Back® mounting systems
- **Reversing Conveyor Ready:** Cleans forward and reverse runs without modification
- **Wide Belt Coverage:** Fits belt widths from 18" to 96"; custom tube lengths available
- **Safety & Uptime:** Fast service reduces downtime and removes confined-space hazards
- **Total Satisfaction Guarantee (TSG)** – ASGCO®'s unmatched customer service policy ensures your satisfaction

ASGCO®
Complete Conveyor Solutions



SPECIFICATIONS

- **Belt Speed:** <1000 fpm
- **Temperature:** -20 F to 180 F
- **Belt Widths:** 18" – 96"
- **Urethane Blade Thickness:** 2"
- **CEMA class** 5

Need Solutions...to improve efficiency, safety and productivity? **ask... ASGCO®**
www.asgco.com | 800.344.4000 | info@asgco.com

ASGCO®
Complete Conveyor Solutions

RAZOR-BACK® CSB RETRACTABLE BELT CLEANER

Razor-Back® CSB Retractable with Flat Carbide Blade

PA Part Numbers RT		Description	Belt Width		Weight	
w/ Spring-Shoc™ Tensioner	w/ Low-Profile Spring-Shoc™ Tensioner		in	mm	lbs	kg
M-CSB-OS-18-FC-ST	M-CSB-OS-18-FC-LP	Razor-Back® CSB for 18" Belt Widths	18"	450		
M-CSB-OS-24-FC-ST	M-CSB-OS-24-FC-LP	Razor-Back® CSB for 24" Belt Widths	24"	600		
M-CSB-OS-30-FC-ST	M-CSB-OS-30-FC-LP	Razor-Back® CSB for 30" Belt Widths	30"	750		
M-CSB-OS-36-FC-ST	M-CSB-OS-36-FC-LP	Razor-Back® CSB for 36" Belt Widths	36"	900		
M-CSB-OS-42-FC-ST	M-CSB-OS-42-FC-LP	Razor-Back® CSB for 42" Belt Widths	42"	1100		
M-CSB-OS-48-FC-ST	M-CSB-OS-48-FC-LP	Razor-Back® CSB for 48" Belt Widths	48"	1200		
M-CSB-OS-54-FC-ST	M-CSB-OS-54-FC-LP	Razor-Back® CSB for 54" Belt Widths	54"	1400		
M-CSB-OS-60-FC-ST	M-CSB-OS-60-FC-LP	Razor-Back® CSB for 60" Belt Widths	60"	1500		
M-CSB-OS-72-FC-ST	M-CSB-OS-72-FC-LP	Razor-Back® CSB for 72" Belt Widths	72"	1800		
M-CSB-OS-84-FC-ST	M-CSB-OS-84-FC-LP	Razor-Back® CSB for 84" Belt Widths	84"	2100		
M-CSB-OS-96-FC-ST	M-CSB-OS-96-FC-LP	Razor-Back® CSB for 96" Belt Widths	96"	2400		

Razor-Back® CSB Retractable with Flat Urethane Blade

PA Part Numbers RT		Description	Belt Width		Weight	
w/ Spring-Shoc™ Tensioner	w/ Low-Profile Spring-Shoc™ Tensioner		in	mm	lbs	kg
M-CSB-OS-18-FU-ST	M-CSB-OS-18-FU-LP	Razor-Back® CSB for 18" Belt Widths	18"	450		
M-CSB-OS-24-FU-ST	M-CSB-OS-24-FU-LP	Razor-Back® CSB for 24" Belt Widths	24"	600		
M-CSB-OS-30-FU-ST	M-CSB-OS-30-FU-LP	Razor-Back® CSB for 30" Belt Widths	30"	750		
M-CSB-OS-36-FU-ST	M-CSB-OS-36-FU-LP	Razor-Back® CSB for 36" Belt Widths	36"	900		
M-CSB-OS-42-FU-ST	M-CSB-OS-42-FU-LP	Razor-Back® CSB for 42" Belt Widths	42"	1100		
M-CSB-OS-48-FU-ST	M-CSB-OS-48-FU-LP	Razor-Back® CSB for 48" Belt Widths	48"	1200		
M-CSB-OS-54-FU-ST	M-CSB-OS-54-FU-LP	Razor-Back® CSB for 54" Belt Widths	54"	1400		
M-CSB-OS-60-FU-ST	M-CSB-OS-60-FU-LP	Razor-Back® CSB for 60" Belt Widths	60"	1500		
M-CSB-OS-72-FU-ST	M-CSB-OS-72-FU-LP	Razor-Back® CSB for 72" Belt Widths	72"	1800		
M-CSB-OS-84-FU-ST	M-CSB-OS-84-FU-LP	Razor-Back® CSB for 84" Belt Widths	84"	2100		
M-CSB-OS-96-FU-ST	M-CSB-OS-96-FU-LP	Razor-Back® CSB for 96" Belt Widths	96"	2400		

Razor-Back® CSB Retractable with Curved Urethane Blade

PA Part Numbers RT		Description	Belt Width		Weight	
w/ Spring-Shoc™ Tensioner	w/ Low-Profile Spring-Shoc™ Tensioner		in	mm	lbs	kg
M-CSB-OS-18-CU-ST	M-CSB-OS-18-CU-LP	Razor-Back® CSB for 18" Belt Widths	18"	450		
M-CSB-OS-24-CU-ST	M-CSB-OS-24-CU-LP	Razor-Back® CSB for 24" Belt Widths	24"	600		
M-CSB-OS-30-CU-ST	M-CSB-OS-30-CU-LP	Razor-Back® CSB for 30" Belt Widths	30"	750		
M-CSB-OS-36-CU-ST	M-CSB-OS-36-CU-LP	Razor-Back® CSB for 36" Belt Widths	36"	900		
M-CSB-OS-42-CU-ST	M-CSB-OS-42-CU-LP	Razor-Back® CSB for 42" Belt Widths	42"	1100		
M-CSB-OS-48-CU-ST	M-CSB-OS-48-CU-LP	Razor-Back® CSB for 48" Belt Widths	48"	1200		
M-CSB-OS-54-CU-ST	M-CSB-OS-54-CU-LP	Razor-Back® CSB for 54" Belt Widths	54"	1400		
M-CSB-OS-60-CU-ST	M-CSB-OS-60-CU-LP	Razor-Back® CSB for 60" Belt Widths	60"	1500		
M-CSB-OS-72-CU-ST	M-CSB-OS-72-CU-LP	Razor-Back® CSB for 72" Belt Widths	72"	1800		
M-CSB-OS-84-CU-ST	M-CSB-OS-84-CU-LP	Razor-Back® CSB for 84" Belt Widths	84"	2100		
M-CSB-OS-96-CU-ST	M-CSB-OS-96-CU-LP	Razor-Back® CSB for 96" Belt Widths	96"	2400		

Need Solutions...to improve efficiency, safety and productivity? ask... ASGCO®

www.asgco.com | 800.344.4000 | info@asgco.com

