

# ARROWHEAD®

## DRIVE AND NON-DRIVE RUBBER PULLEY LAGGING

**Arrowhead® Drive and Non-Drive Pulley Lagging** is the solution, in an application where rubber is the answer, to help eliminate slippage, increase pulley life and to improve production.

### Arrowhead® Drive Lagging



### Smooth Lagging



#### PATTERN REPEATS

2" sections with a cutting / seam groove.

### FEATURES AND BENEFITS

- **MSHA approved for mine use** – meets all requirements for flame resistant solid products taken into mines. Acceptance Marking No. MSHA IC -174/2
- **Increase Productivity** – by delivering increased traction between the conveyor belt and pulley, and increasing pulley life and reducing buildup.
- **Improved Conveyor Belt Tracking** – due to the Arrowhead patterns self-cleaning ability, which reduces material carry-back build up and thereby eliminates the major source of misalignment.
- **Superior Wear** – ability in abrasive or highly wet or dry applications as seen in below ground and above ground mining.
- **Bonding Strength** – that is superior to others, due to 3mm of our neoprene compound vulcanized into bottom-side of the lagging.
- **Easy Installation** – can be done in place, on plant site, at your local distributor or at the pulley manufacturer. Each roll is ½" or ¾" thick x 10" wide by 21.3' long. 300' (90m) long rolls will be available in January of 2006.
- **Available** – in Drive and Non-Drive Rubber Pulley Lagging and Natural and MSHA Grade

**ASGCO®**  
Complete Conveyor Solutions




**Need Solutions...**to improve efficiency, safety and productivity? **ask... ASGCO®**

[www.asgco.com](http://www.asgco.com) | 800.344.4000

@2024 ASGCO® "Complete Conveyor Solutions"

**ASGCO®**  
Complete Conveyor Solutions

# ARROWHEAD® DRIVE AND NON-DRIVE RUBBER PULLEY LAGGING

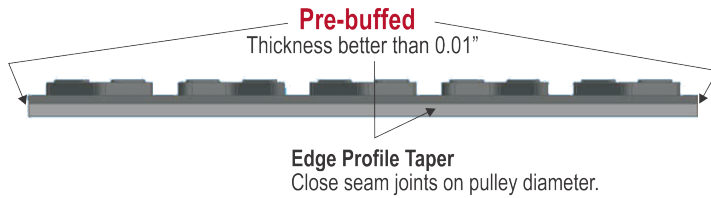

Arrowhead® Rubber Lagging					
Part Number	Style	Durometer	Thickness	Width	Weight lbs
ASG-10X21.33-1/2-TRL	Drive	60	1/2"	10	42
ASG-10X21.33-3/4-TRL	Drive	60	3/4"	10	60
ASG-10X21.33-1/2-TRL-PLN	Smooth	60	1/2"	10	48
ASG-10X21.33-1/2-TRL-SM	Smooth	45	1/2"	10	52
ASG-10X278-1/2-TRL	Drive	60	1/2"	10	626

Arrowhead® MSHA Rubber Lagging					
Part Number	Style	Durometer	Thickness	Width	Weight lbs
ASG-10X21.33-1/2-MSHA-TRL	Arrowhead	60	1/2"	10	42
ASG-10X21.33-3/4-MSHA-TRL	Arrowhead	60	3/4"	10	56
ASG-10X278-1/2-MSHA-TRL	Arrowhead	65	1/2"	10	626
ASG-10X21.33-1/2-MSHA-PLN	Smooth	60	1/2"	10	51

**Need Solutions...**to improve efficiency, safety and productivity? **ask... ASGCO®**

www.asgco.com | 800.344.4000

@2024 ASGCO® "Complete Conveyor Solutions"

